


# LED OFFICE ILLUMINATOR

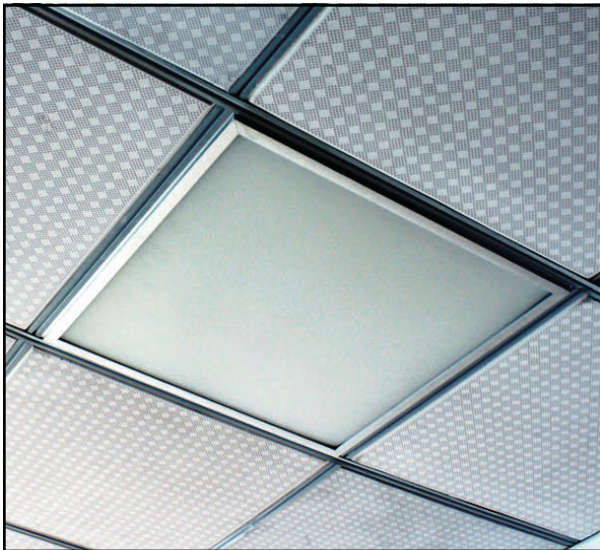

FIXTURE TYPE \_\_\_\_\_

JOB NAME \_\_\_\_\_

REP HUDNUT LED LIGHTING SOLUTIONS

PART NUMBER \_\_\_\_\_

## SPECIFICATIONS

LED lighting for the modern, energy efficient office

Lay-in grid mount or pendant mount

>75 CRI - 3000k, 4500k, and 6000k available

>50,000 hours life to 70% lumen maintenance

Operating ambient temperature range: -40F through +122F

120 degree beam spread

Proprietary lens for uniform illumination and maximum efficiency

No lamp image or harsh glare

Dimmable with dimmable power supply

See reverse for power supply information

1' x 1' fixture 1100 lumens (6000k) 14watts

1' x 2' fixture 2200 lumens (6000k) 28watts

2' x 2' fixture 4500 lumens (6000k) 56watts

1 year warranty

Indoor use only

## ORDERING INFORMATION

<u>SERIES</u>	<u>LIGHT</u>	<u>BEAM</u>	<u>VOLTS</u>	<u>MOUNTING</u>	<u>FINISH</u>	<u>OPTIONS</u>
1x1 PANEL-Q1	28 = 2800K	120	24	SM = grid or pendant	SA = SATIN ALUM.	***
1x2 PANEL-Q1	33 = 3300K					
1x3 PANEL-Q1	60 = 6000K					
2x2 PANEL-Q1						

## NOTES

\*\*\*Other options may be available. Contact Hudnut LED Lighting Solutions for additional information.

Product may differ slightly from photo All values are nominal.

# HUDNUT LED LIGHTING

11916 NE SUMNER STREET PORTLAND, OREGON 97220 503-233-8088 WWW.HUDNUT.COM INFO@HUDNUT.COM