


LED 2x2 OFFICE ILLUMINATOR

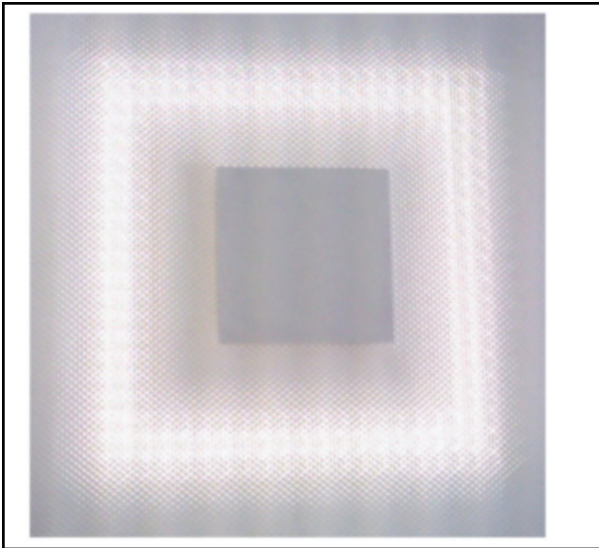

FIXTURE TYPE _____

JOB NAME _____

REP **HUDNUT LED LIGHTING**

PART NUMBER _____

SPECIFICATIONS

Lay-in grid mount for easy integration into most office ceilings

>75 CRI - 3300k,

>50,000 hours life to 70% lumen maintenance

Operating ambient temperature range: -40F through +122F

110 degree beam spread

Fully dimmable with standard dimmers

Available with on-board daylight harvesting and occupancy sensors

For a self-contained energy efficiency package

2' x 2' fixture 3236 lumens @ 49watts

67 lumens per watt total fixture efficiency

0.98 power factor

5 year warranty

Toolless entry for easy upgrades

LED modules are accessible and replaceable

Power supply is accessible and replaceable

UL pending

ORDERING INFORMATION

<u>SERIES</u>	<u>LIGHT</u>	<u>BEAM</u>	<u>VOLTS</u>	<u>WATTS</u>	<u>MOUNTING</u>	<u>OPTIONS</u>
2x2 PANEL-Q2	33K = 3300K	160	120 277	49	GRID	DH = daylight harvesting OC = occupancy sensor

NOTES

***Other options may be available. Contact Hudnut LED Lighting Solutions for additional information.

Product may differ slightly from photo. All values are nominal.

HUDNUT LED LIGHTING

11916 NE SUMNER STREET PORTLAND, OREGON 97220 503-233-8088 WWW.HUDNUT.COM INFO@HUDNUT.COM