

Fin color:



White Silver Black

Line Voltage

R-30 F

80 degree beam

⚡ 120V / 220V line current

Medium screw base: E26, E27

50,000 hour rated life

Replaces:

65W Incandescent /
26W Compact Fluorescent

Par 30 LED Lamp

15 Watt typical (22W max)

Light Output

310-370 Lumen (useful)

Indoor/Outdoor

wet and dry locations

White (3) Color Temperatures:

○ **Warm** White (2700K)

○ **Neutral** White (3500K)

○ **Cool** White (4500K)

Operating:

Open Air Fixtures -4°F to 105°F
-20°C to 40°C

Dimmable with reverse phase control dimmers or the continuous current (sine wave) control dimmers.

See enluxLED.com for a list of tested compatible dimmers.

Weight: 9 oz.

UL /CUL/CE /C-Tick rated




3-Year Warranty

Performance:

enLux RGB LED Light for general illumination is powered by it's proprietary, patented Solid State C.O.B. Light Engine coupled with it's unique patented thermal management components providing high efficacy and maximum energy efficiency-15 Watts typical.


*The enLux R-30 Series LED Light aluminum housing is finished in a ultra durable top coat, will not shatter or break when dropped. Safe, cool to touch, **100% recyclable** (no mercury or hazardous materials).*



R30F Down Light Photometrics

0 ft Illuminances Distribution Ratio

3 ft	-	-	-	0.420	1.000
6 ft	-			0.105	0.173
9 ft			0.047	0.061	0.093
12 ft		0.026	0.035	0.043	0.057
15 ft	0.017	0.020	0.026	0.031	0.038
	15 ft	12 ft	9 ft	6 ft	3 ft
					CL

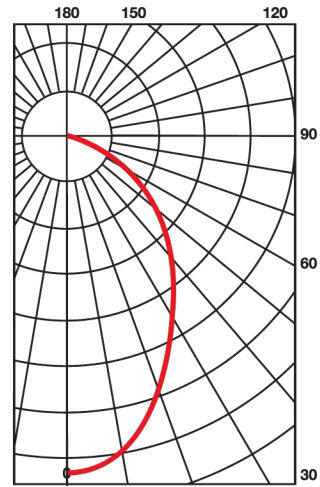

R30F Illuminance at Beam Centerline



White	CCT	P/N	Total Lumen	Throw Distance (feet)				
				3	6	9	12	15
Warm	2700°K	0011XX	310	215.2	53.8	23.9	13.4	8.6
Neutral	3500°K	0013XX	340	239.1	59.8	26.6	14.9	9.6
Cool	4500°K	0014XX	370	263.0	65.	29.2	16.4	10.5

Unit in lux
1 lux = 0.0929 footcandle (fc)

R30F White E26/E27 Base



Product Code	White Light CCT	Voltage	Fin Color
00	11 Warm (2700°K)	0 120V Dimmable	0 White
	13 Neutral (3500°K)	1 110V Dimmable	1 Black
	14 Cool (4500°K)	2 220V (200-250V) Non-dimmable	2 Silver
	91 Warm Hi-CRI (2700°K)	3 100V Dimmable	
	93 Neutral Hi-CRI (3500°K)	4 120V (100-130V) Non-dimmable	
	94 Cool Hi-CRI (4500°K)		

Examples

001102	R30 Flood	Warm White	120V	Silver Fin	
001301	R30 Flood	Neutral White	120V	Black Fin	
001430	R30 Flood	Cool White	100V	White Fin	
009401	R30 Flood	Cool White	Hi-CRI	120V	Black Fin

